

POWERLOK[®]

RACK POWER DISTRIBUTION

Rack PDU Installation & Operating Manual



8401 Washington Place NE,
Albuquerque, NM 87104

888-982-7800
info@upsite.com

Contents

- Introduction / About this manual 3
- Safety Precautions 3
 - Equipment grounding 4
- Product Specifications..... 4
 - Mechanical Specifications**..... 4
 - Electrical Specifications**..... 4
 - Packaging**..... 5
- Regulatory Compliance 6
- Installation 7
 - Power Monitoring 8
 - Ethernet Communication..... 9
 - Web Browser 9
- Limited Warranty 11

Introduction / About this manual

The innovative PowerLok Rack PDU is a next-generation offering for the mission critical industry. All PowerLok Rack PDUs are engineered, designed, tested, and manufactured in the United States. Our processes ensure that our customers' servers run reliably and efficiently in the highly competitive, 24/7 mission critical industry. PowerLok's quick-ship program make configuring, ordering and receiving Rack PDUs seamless and easy.

Safety Precautions

Specific safety precautions for this product are as follows:

- All precautions should be taken to guarantee a safe work and operational environment. General safety precautions must be observed during all aspects of operation of equipment described in this document. Failure to comply with the safety warnings, procedures, and guidelines presented in this document is in violation of the safety standards of design, manufacture, and intended use of this equipment.
- You are responsible for following the safety guidelines and warnings presented in this document for this equipment. Individuals using Gateview Rack PDUs are expected to follow all the noted warnings and safety precautions necessary for safe operation of the equipment in your environment. Gateview Technologies assumes no liability for failure to comply with these requirements.
- Rack PDUs are intended for indoor use only in a controlled environment that adhere to the operating temperatures within this manual. Any use outside of these constraints may void the warranty.
- Rack PDUs rated for 240/415VAC may be fitted with a NEMA L22-20 or L22-30 plug that is rated for a higher voltage. Caution must be taken to assure that the rating of the Rack PDU and the supply voltage match.
- **The total capacity of equipment connected to the Rack PDU CANNOT EXCEED the maximum load rating of the Rack PDU.**



DANGER

HAZARDOUS VOLTAGE, CURRENT, AND ENERGY LEVELS ARE PRESENT IN THIS PRODUCT. INTERNAL CIRCUITS CAN HAVE HAZARDOUS VOLTAGES PRESENT EVEN WITH PDU CIRCUIT BREAKERS IN THE OFF POSITION. DO NOT OPERATE THE PRODUCT WITH THE COVER REMOVED.

Professionals installing and operating Rack PDUs are advised of the following:

- Do not try to modify the Rack PDU in anyway, including the input plug, power whip and receptacles.
- Do not drill into or attempt to open any part of the Rack PDU enclosure. There are no serviceable parts inside the Rack PDU.
- Do not attempt to use the Rack PDU if any part of it is damaged.
- Rack PDUs with circuit breakers (30A rating) must be mounted vertically.
- Do not mount the Rack PDU to an unstable enclosure or surface.

Equipment grounding

To minimize electrical shock hazard, the Rack PDU chassis/enclosure is connected to the electrical earth ground pin of the Rack PDU plug. The input power cable must be plugged into an industry electrical code compatible receptacle which provides connection to the facility electrical safety ground.

Product Specifications

The following section gives the mechanical and electrical specifications of the Rack PDU.

Mechanical Specifications

Chassis dimensions in inches and (mm). See specifications for complete outline drawings.

Vertical PDU	Length	Width	Depth
24L	23.98 (609)	2.18 (55.37)	2.00 (50.80)
36L	35.98 (914)		
41L	40.98 (1041)		
46L	45.98 (1168)		
72L	72.00 (1829)		
82L	82.00 (2083)		

Electrical Specifications

Electrical Ratings	Current Rating*	Number of Wires	Wire Gauge	Operating Temperature
208V 1PH	20A	3	12	0°C - 55°C (32°F - 131°F)
208V 1PH	30A	3	10	
120V/208V WYE 3PH	20A	5	12	
120V/208V WYE 3PH	30A	5	10	
240V/415V WYE 3PH	20A	5	12	
240V/415V WYE 3PH	30A	5	10	
208/240V DELTA 3PH	30A	4	10	
208/240V DELTA 3PH	50A	4	6	
208/240V DELTA 3PH	60A	4	6	

*Rack PDUs rated 30A-60A line current contain 20A circuit breakers for load protection. The circuit breakers are UL-489 Listed and rated 5 or 10kAIC depending on model. Per the National Electrical Code (NEC) and Canadian Electrical Code (CEC) requirements, when in service, the line current of 20A rated Rack PDUs is to be limited to 16A. The line current of 30A rated Rack PDUs is to be limited to 24A.


Packaging

Rack PDUs are shipped in molded 1.8 EPS foam and 200 double-wall corrugated cartons.

72L Package	Dimensions	Approx. Ship Weight	Lifting Handles	Maximum PDUs per pallet	Maximum height per 44" x 82" pallet
1-pack	80 x 11 x 5	17	No	48	65" (12 levels)
2-pack		35		96	
3-pack	80 x 22 x 5	52	Yes	72	
4-pack		68		96	

82L Package	Dimensions	Approx. Ship Weight	Lifting Handles	Maximum PDUs per pallet	Maximum height per 44" x 92" pallet
1-pack	90 x 11 x 5	19	No	48	65" (12 levels)
2-pack		37		96	

72L Packaging example:

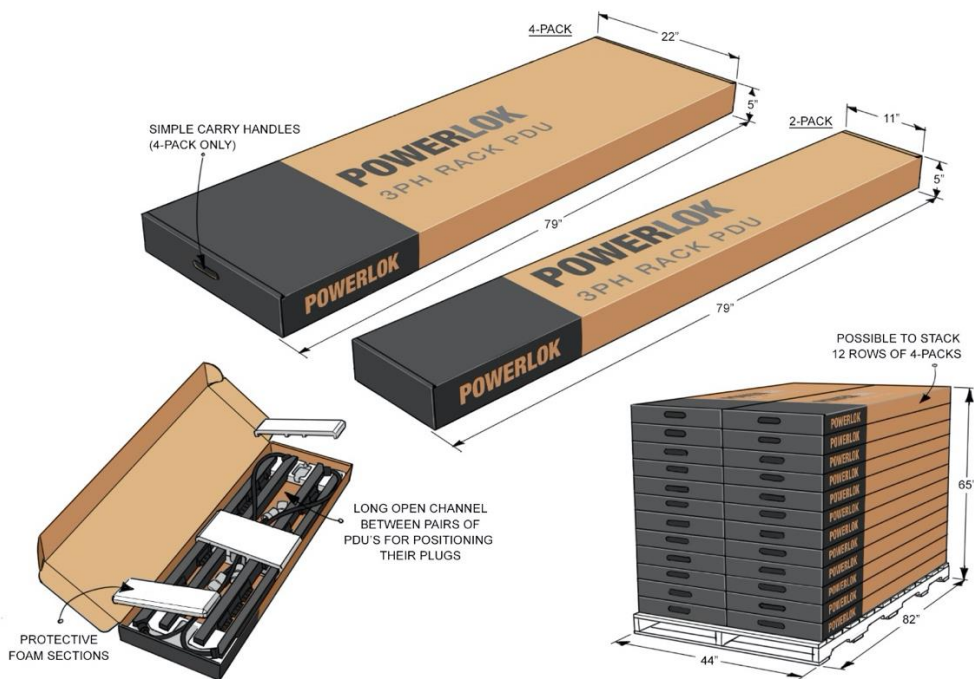

Regulatory Compliance

Product Safety

Rack PDUs have been safety tested and certified to the following standards:

- USA UL 60950-1: 2nd edition October 2014
- CAN/CSA 22.2 No. 60950-1
- Canada ICES-003 (A) / NMB-003 (A)
- FCC Part 15 Class A compliant
- RoHS compliant
- NOM Addendum

USA Notification

Note: This equipment has been tested and found to comply with the limits for a Class A digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference when the equipment is operated in a commercial environment. This equipment generates, uses, and can radiate radio frequency energy and, if not installed and used in accordance with the instruction manual, may cause harmful interference to radio communications. Operation of this equipment in a residential area is likely to cause harmful interference in which case the user will be required to correct the interference at their own expense.

Canadian Notification

This Class A digital apparatus meets all requirements of the Canadian Interference-Causing Equipment Regulations.


Installation

Installation of Rack PDUs into a server rack is performed by using the buttons attached to the back of the Rack PDU. These buttons mate with keyhole slots located in the server rack. Alternately, the Rack PDU mounted buttons may be removed (attached with #6 thread forming screws) and a customer supplied bracket designed for Rack PDU mounting may be attached. The attachment screw should not penetrate the Rack PDU chassis more than 0.125".

Key slot example:



Mounting button detail:

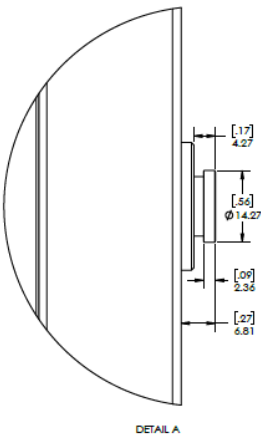

Power Monitoring

For PowerLok models with monitoring.

Local touchscreen display and/or ethernet communication ports.

Power monitoring:


1. Ethernet communication only
2. Local touchscreen display and Ethernet communication



Monitoring accuracy:

- Voltage: $\pm 0.5\%$ at nominal
- Current: $\pm 1.0\%$ of measurement from 250 mA – 1A
- Current: $\pm 0.5\%$ of measurement from 1A – 30A

The LCD display is a touchscreen that can rotate 180 degrees. The illustration below shows a 30A/208V Rack PDU example:

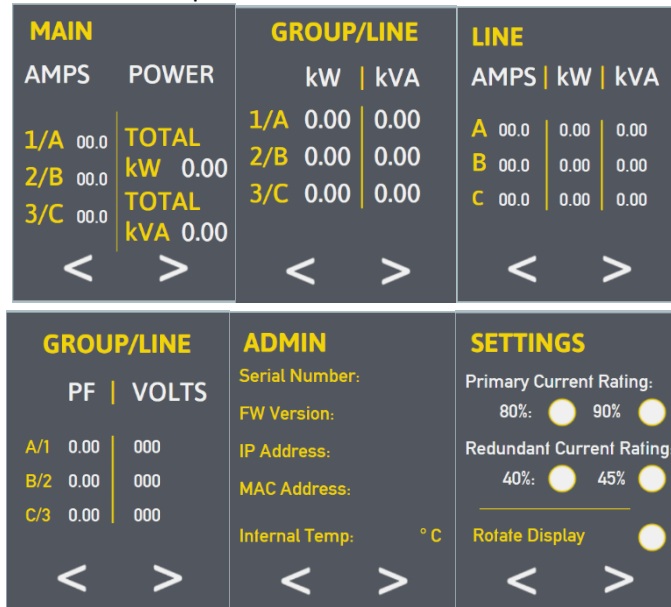

Ethernet Communication

The Rack PDU is equipped with two RJ45 10/100Base-T Ethernet ports to attach to an existing local area network (TCP/IP v4). This connection allows access to the Rack PDU via a web browser or SNMP client.


The Rack PDU supports three methods of assigning the IP address, default gateway and subnet mask.

Addressing mode	Description	Comment
Linked local	IPv4 link-local addresses are assigned to address block 169.254.0.0 - 169.254.255.255	This addressing mode supports attaching a host PC/laptop directly to the Rack PDU without requiring a switch, router or DHCP server.
DHCP	The Rack PDU network configuration information is provided by the DHCP server.	The local touchscreen display will publish the IP address assigned to the Rack PDU by the DHCP server.
Static IP	Default PDU network configuration IP address: 192.168.1.254 Subnet Mask: 255.255.255.0 Gateway: 192.168.1.1	The static IP information can be changed using a web browser.

Web Browser

The Rack PDU is equipped with a web server page that is accessible over IP. For each data set, the historical graphing or historical logs can be viewed.

Web page real-time and historical graphing:

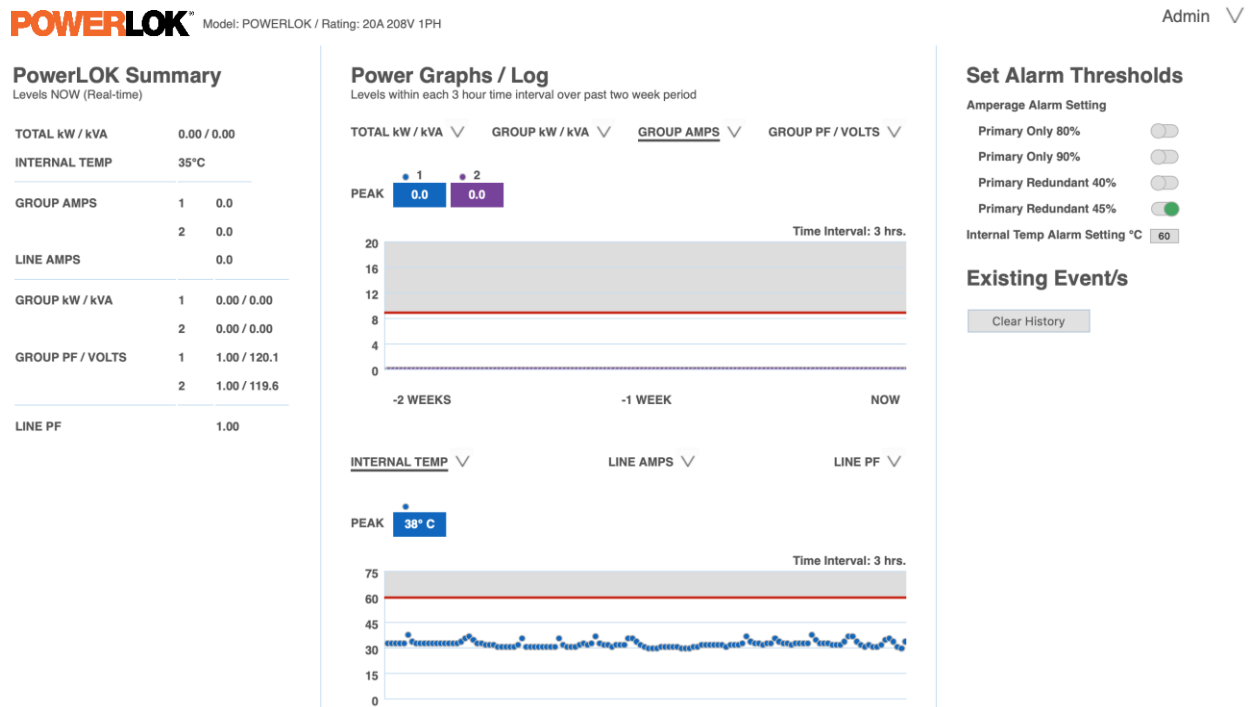

Historical logs:

In addition to graphing, PowerLok also makes historical logs available in various scales:

PowerLOK Summary

Levels NOW (Real-time)

TOTAL kW / kVA	0.00 / 0.00
INTERNAL TEMP	35°C
GROUP AMPS	1 0.0 2 0.0
LINE AMPS	0.0
GROUP kW / kVA	1 0.00 / 0.00 2 0.00 / 0.00
GROUP PF / VOLTS	1 1.00 / 120.1 2 1.00 / 119.6
LINE PF	1.00

Power Graphs / Log

Levels within each 3 hour time interval over past two week period

TOTAL kW / kVA ▾ GROUP kW / kVA ▾ GROUP AMPS ▾ GROUP PF / VOLTS ▾

		1	2
TODAY	aNaN	0	0
-1 DAY	aNaN	0	0
-2 DAYS	aNaN	0	0
-3 DAYS	aNaN	0	0
-4 DAYS	aNaN	0	0
-5 DAYS	aNaN	0	0
-6 DAYS	aNaN	0	0
-7 DAYS	aNaN	0	0
-8 DAYS	aNaN	0	0
-9 DAYS	aNaN	0	0
-10 DAYS	aNaN	0	0
-11 DAYS	aNaN	0	0
-12 DAYS	aNaN	0	0
-13 DAYS	aNaN	0	0
-14 DAYS	aNaN	0	0
-15 DAYS	aNaN	0	0

Log Scale

- 1 min.
- 10 min.
- 30 min.
- 1 hr.
- 2 hr.
- 4 hr.

INTERNAL TEMP ▾ LINE AMPS ▾ LINE PF ▾

Admin section of the Web server:

Admin ▾

Admin

Model Number: POWERLOK

Serial Number: 20US0K15190001

Firmware Version: 0.0.3.rc02

FTP Enabled:

IP Addressing Mode:
 Linked Local
 DHCP
 Static IP

IP Address:

Subnet Mask:

Default Gateway:

MAC Address: 70-B3-D5-A7-0F-AC

Hardware Version: 1.0.0

MIB (Management Information Base) and firmware upgrades:

For a current MIB list or firmware upgrades, please contact your PowerLok reseller. Firmware is upgraded locally through the ethernet port on the PDU.

Limited Warranty

Warranty Replacement Procedure: All product warranty procedures are conditional upon the warranty information set forth in Gateview Technologies Terms and Conditions for a term of three (3) years from the shipment of the product. Gateview Technologies will provide a replacement product if it is defective in accordance with the following: This warranty does not apply to normal wear and tear or damage resulting from damage, misuse, abuse, or neglect. No service or maintenance is required and there are no serviceable parts inside of the product. Do not attempt to open the Rack PDU or the customer will void the warranty.

The customer should ensure prior to use whether this product is suitable, adequate, or safe for the use intended. Since individual applications are subject to great variation, Gateview Technologies makes no representation or warranty as to the suitability or fitness of these products for any specific application and Gateview Technologies is not responsible for equipment damaged by incorrect communication on the part of the customer between the customer and Gateview Technologies.

The customer will incur the cost of shipping the defective product to Gateview Technologies, and, if a replacement is necessary, Gateview Technologies will reimburse the customer for shipping and subsequently ship a replacement product within fourteen (14) days of receipt of the defective product. If replacement of the product is not necessary, Gateview Technologies reserves the right to deny reimbursement for the shipping of the product returned from the customer.

Notices

Version 1.4 Copyright © 2020 Gateview Technologies, Inc. All rights reserved.
PO Box 2134, Wake Forest, NC 27588 USA

All Rights Reserved

This product manual is protected by copyright and all rights are reserved. No part of this manual may be reproduced or transmitted by any means or in any form, without prior consent in writing from Gateview Technologies.

Gateview Technologies reserves the right to update the product manual at any time. In no event shall Gateview Technologies be liable for damages resulting from any omission in this document.

Gateview and the PowerLok logos are a trademark of Gateview Technologies and are registered in the USA. Use of the logos for commercial purposes without the prior written consent of Gateview Technologies may constitute trademark infringement and unfair competition in violation of federal and state laws.